

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 132 573
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 84106895.0

(51) Int. Cl.⁴: G 06 F 15/20

(22) Date of filing: 15.06.84

(30) Priority: 21.06.83 JP 111457/83

(43) Date of publication of application:
13.02.85 Bulletin 85/7(84) Designated Contracting States:
DE FR GB(71) Applicant: DAIKIN INDUSTRIES, LIMITED
Shinhankyu-Building, 12-39, 1-chome Umeda
Kita-ku Osaka-shi Osaka(JP)(72) Inventor: Ishida, Koichi
5-40, Higashikusatsu 2-chome
Kusatsu-shi Shiga-ken(JP)(72) Inventor: Yasui, Takashi
22-4 Minamidaira 7-chome
Hino-shi Tokyo(JP)(72) Inventor: Okawa, Makoto
1000-5 Azaoonani Okamoto-cho
Kusatsu-shi Shiga-ken(JP)(74) Representative: Prüfer, Lutz H., Dipl.-Phys.
Harthausen Strasse 25d
D-8000 München 90(DE)


(54) Clip circuit of CRT display units.

(57) A clip circuit (17) of a CRT display unit clips off, by means of a simple operation, the portion of a polygon (5) protruding from the three-dimensional space (4) when the polygon (5) is partially inserted into the three-dimensional space. More specifically, a window register (175) stores therein the data on the primary to tertiary planes forming the three-dimensional space, respectively comprised of a pair of planes. A host computer (10) provides three-dimensional coordinate data representing the respective vertexes of the polygon. An ALU (177) first extracts from the vectors constituting the polygon, a line segment existing in a field bounded by a pair of primary planes, according to the three-dimensional coordinate data from the window-register and the three-dimensional plane data from the host computer. Then, from the above stated line segment, the ALU (177) extracts a line segment existing in a field bounded by a pair of secondary planes and further extracts from this line segment, a line segment existing in a field bounded by a pair of tertiary planes, so that the other portions excluding the extracted line segments are clipped off. Accordingly, the unnecessary portions of a polygon can be clipped off only by one processing operation for each pair of primary to tertiary planes, which means that only three processing operations are required.

EP 0 132 573 A2

./...

FIG. 4

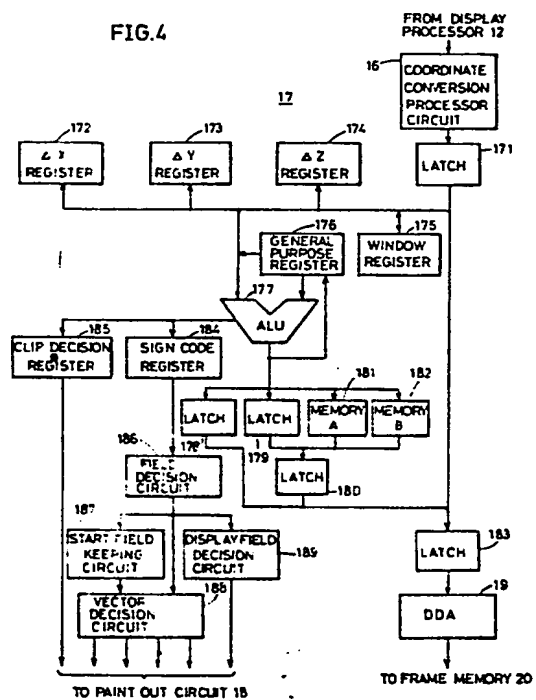

Clip Circuit of CRT Display Unit

The present invention relates to a clip circuit of a
5 CRT display unit. More particularly, the present
invention relates to an improvement of a clip circuit of a
CRT display unit, by which the portions of a polygon
protruding from the three-dimensional space can be clipped
off when the polygon is partially inserted into the
10 three-dimensional space represented on the screen of a CRT
display unit.

Figs. 1 and 2 are diagrams for explaining a method in
which a polygon is partially inserted and represented in
15 the three-dimensional space represented on the screen of a
conventional color CRT display unit.

Referring to Fig. 1, in case where a polygon 5 is
inserted in the three-dimensional space 4 by enlargement,
parallel movement, rotation or the like, data on the
20 coordinates $P_0 (x_0, y_0, z_0)$, $P_1 (x_1, y_1, z_1)$... $P_5 (x_5,$
 $y_5, z_5)$ representing the respective vertexes of the
polygon 5 are generally supplied from a host computer to a
color CRT display unit. Then, in the color CRT display
unit, vectors connecting the vertexes P_0 to P_5 are

calculated so that the polygon 5 as shown in Fig. 1 is represented. In the polygon 5, the portions protruding from the three-dimensional space 4 are clipped off and only the portions existing in the three-dimensional space 4 are painted out in color.

For this purpose, points of intersection between the planes 1_a , 1_b , 3_a , 3_b , 2_a , 2_b of x , y , z forming the three-dimensional space 4 and the respective vectors of the polygon 5 are calculated so that a new polygon is obtained by clipping so as to have the planes formed by these intersection points and the vertexes existing in the three-dimensional space 4. However, in this method, a closed polygon is not structured with respect to the planes 1_a to 3_b , if the polygon is viewed from the plane 2_a for example, as shown in Fig. 2, and accordingly painting out cannot be perfectly performed. In other words, such a conventional method has a disadvantage that all the areas of the polygon 5 included in the three-dimensional space 4 cannot be painted out.

As one of the methods for dissolving such a disadvantage, "Computer Graphics Clipping System for Polygons" invented by Ivan E. Sutherland et al. (USP 3,816,726) is well known. In this computer aided graphics clipping system for polygons, it is individually determined concerning each of the planes 1_a , 1_b , 2_a , 2_b ,

3a and 3b forming the three-dimensional space 4 shown in Fig. 1 whether each such plane intersects with the polygon 5, whereby the portions not included in the three-dimensional space are clipped. More specifically, according to the invention by Sutherland et al., the polygon 5 is clipped by the respective planes 1a, 1b, 2a, 2b, 3a and 3b. However, in this method, since it is necessary to clip the polygon 5 with respect to each of the planes 1a, 1b, 2a, 2b, 3a and 3b forming the three-dimensional space and hence six processing operations are required, complication of the processing operation cannot be avoided.

Therefore, a primary object of the present invention is to provide a clip circuit of a CRT display unit, in which the three-dimensional space is decomposed into primary to tertiary planes respectively comprising a pair of planes spaced by a fixed distance, and based on these primary to tertiary planes, line segments existing in the three-dimensional space are extracted from the vectors constituting a polygon so that a new polygon represented by the extracted line segments can be completely painted out.

According to the present invention, in order to perform clipping operation with respect to a part of a

5 polygon existing in the three-dimensional space,
three-dimensional coordinate data representing the
respective vertexes of the polygon and three-dimensional
plane data representing the primary to tertiary planes
10 forming the three-dimensional space are provided as
output. Based on these data, it is determined whether or
not a start point and an end point of each vector
constituting the polygon exist in a field bounded by each
pair of planes forming the three-dimensional space, or
15 whether or not any one of the vectors extends from the
three-dimensional space to the outside or from the outside
into the three-dimensional space. Then, from the vector
extending from the three-dimensional space to the outside
or from the outside into the three-dimensional space, a
20 line segment existing in a field bounded by a pair of
primary planes is extracted and from the line segment, a
line segment existing in a field bounded by a pair of
secondary planes is extracted. Furthermore, from the line
segment, a line segment existing in a field bounded by a
25 pair of tertiary planes is extracted. Then, the other
portions excluding the extracted line segments are
clipped.

Therefore, according to the present invention, only
the line segments bounded by the pairs of primary to
25 tertiary planes constituting the three-dimensional space

are extracted and the other line segments are clipped off,
and as a result the processing time can be shortened as
compared with a conventional case as described above where
a polygon is clipped with respect to each of the planes
5 forming the three-dimensional space.

These objects and other objects, features, aspects
and advantages of the present invention will become more
apparent from the following detailed description of the
present invention when taken in conjunction with the
10 accompanying drawings.

Figs. 1 and 2 are diagrams for explaining a
conventional method in which a polygon is inserted and
represented in the three-dimensional space represented on
15 the screen of a conventional color CRT display unit.

Fig. 3 is a schematic block diagram of a color CRT
display unit to which the present invention is applied.

Fig. 4 is a concrete block diagram of an embodiment
of the present invention.

20 Figs. 5A and 5B are diagrams showing the data to be
stored in registers shown in Fig. 4.

Fig. 6 is a flow chart of a main routine for
explaining a concrete operation of an embodiment of the
present invention.

Figs. 7A to 7D are flow charts showing a clipping subroutine.

Figs. 8A, 8B, 9A and 9B are diagrams for explaining a start point and an end point at the time of clipping a polygon in the WZ planes.

Fig. 10 is a diagram for explaining the operation of clipping of a polygon in the WZ planes.

Fig. 11 is a diagram for explaining the operation of clipping of a polygon in the WY planes.

Fig. 12 is a diagram for explaining the operation of clipping of a polygon in the WX planes.

Figs. 13 to 15 are diagrams for explaining the operation of clipping of a vector which enters the three-dimensional space from the outside and goes out from the three-dimensional space.

Fig. 3 is a schematic block diagram showing the whole structure of a color CRT display unit to which the present invention is applied. First, referring to Fig. 3, an outline of the structure and the operation of a color CRT display unit will be described. A communication control circuit 11 communicates with a host computer 10 to transmit and receive signals. This circuit 11 supplies the data from the host computer 10 to a display processor 12. The display processor 12 is loaded with the data

supplied from the host computer 10. In association with the display processor 12, a program ROM 13, a data RAM 15 and a keyboard 14 are provided. The program ROM 13 stores a necessary program for operation of the display processor 12. The keyboard 14 provides instruction for representing arbitrary data out of the data loaded in the display processor 12.

The data RAM 15 stores instruction and data for representation. A coordinate conversion processor circuit 16 multiplies by the necessary matrices the representation data (x, y, z) provided from the display processor 12, in case of applying extension, reduction, rotation, parallel movement or the like, so that new data (x', y', z') are provided. The data provided from the coordinate conversion processor circuit 16 are supplied to a clip circuit 17 which constitutes an outstanding feature of the present invention.

The clip circuit 17 clips vectors protruding from the three-dimensional space when a polygon is inserted in the three-dimensional space on the screen of the CRT display unit, so that only the vectors in the three-dimensional space are extracted. Output of the clip circuit 17 is supplied to a paint-out circuit 18 and a digital differential analyzer (DDA) 19 serving as a straight-line generating circuit. The paint-out circuit 18 provides

line segments by decomposition into lines inside from the coordinates of the vertexes supplied from the clip circuit 17 in case of painting out a polygon, whereby data for painting out are obtained. The DDA 19 as the

5 straight-line generating circuit calculates coordinates of the intermediate portions in a vector connecting a start point and an end point, based on the coordinates data of a start point and an end point provided from the clip circuit 17, so that the results of the calculation are

10 developed in a frame memory 20 to form a straight line. The frame memory 20 stores the dots on a straight line generated by the DDA 19. The data of the dots stored in the frame memory 20 are supplied to a monitor interface 21. The monitor interface 21 reads the dot data from the

15 frame memory 20 and supplies the dot data to a color monitor 22 together with a synchronizing signal. Accordingly, on the color monitor 22, the three-dimensional space and a clipped polygon are represented.

20 Fig. 4 is a more detailed block diagram of the clip circuit 17 shown in Fig. 3. In the following, the structure of the clip circuit 17 will be described. A latch 171 stores temporarily the data provided from the coordinate conversion processor circuit 16 shown in Fig.

25 3. A window register 175 stores the data WX_{MIN} , WX_{MAX} ,

WY_{MIN} , WY_{MAX} , WZ_{MIN} , and WZ_{MAX} of the respective pairs of primary to tertiary planes constituting the three-dimensional space 4 shown in Fig. 1 as described above. ΔX register 172, a ΔY register 173 and a ΔZ register 174 store respectively the data Δx , Δy , Δz of x , y , z on the difference between a start point and an end point. A general purpose register 176 includes registers R0 to R19 as described subsequently in connection with Figs. 5A and 5B. An arithmetic and logic unit (ALU) 177 performs addition, subtraction and logic operation. Particularly, the ALU 177 in this embodiment performs the following calculations in order to determine the magnitude relation between the coordinates of the vertexes (x_i , y_i , z_i) and the border lines of the three-dimensional space 4.

$$x_i - WX_{MIN}$$

$$x_i - WX_{MAX}$$

$$y_i - WY_{MIN}$$

$$y_i - WY_{MAX}$$

$$z_i - WZ_{MIN}$$

$$z_i - WZ_{MAX}$$

Sign codes obtained as the result of the above described calculations are stored in a sign code register 184.

The sign code register 184 stores sign codes obtained by the calculation in the ALU 177 and supplies the sign codes to a field decision circuit 186. The field decision circuit 186 decides based on the sign codes provided from the sign code register 184 whether or not the coordinates are contained in the fields of the primary to tertiary planes. Output of this field decision circuit 186 is supplied to a start field keeping circuit 187, a vector decision circuit 188 and a display field decision circuit 189. The start field keeping circuit 187 keeps a field obtained by a sign code as the result of the subtraction between a start point and a border line of the three-dimensional space 4. The vector decision circuit 188 decides the characteristic of a vector to provide output, based on a field determined by the field decision circuit 186 and a field kept in the start field keeping circuit 187. The display field decision circuit 189 decides whether or not the vectors constituting a polygon exist in the respective pairs of planes constituting the three-dimensional space. A clip decision register 185 decides based on the output from the ALU 177 whether or not line segments to be clipped exist in the respective vectors constituting the polygon 5.

To an output of the ALU 177, general purpose register 176, latches 178, 179 and 180 and memories (A) 181 and (B)

182 are connected. In the memories 181 and 182, data
obtained as the result of calculation in the ALU 177 are
stored and the stored data are provided therefrom to the
above described DDA 19 shown in Fig. 3 through the latches
5 180 and 183.

Fig. 5A and 5B shows data stored in the general
purpose register 176 shown in Fig. 4. Referring to Fig.
5A and 5B, in the registers R0 to R2 included in the
general purpose register 176, the first coordinates of a
10 vector represented by x, y, z are stored respectively. In
the registers R4 to R6, the coordinates x, y, z of a point
of intersection between the vector and the respective
planes constituting the three-dimensional space are stored
respectively. The registers R8 to R10 store respectively
15 the coordinates x, y, z of a destination point. The
registers R12 to R14 store respectively the coordinates x,
y, z of an intersection point and the register R16 stores
a clip parameter. If this clip parameter is 0, clipping
in the z direction is performed. If the clip parameter is
20 - 1, clipping in the y direction is performed, and in
other case, clipping in the x direction is performed. the
registers R17 to R19 are used as stacks of the destination
points x, y, z stored in the register R8 to R10.

Fig. 6 shows a main routine for explaining the
25 operation of an embodiment of the present invention.

Figs. 7A to 7D are flow charts showing a subroutine for clipping. Figs. 8A to 15 are diagrams for facilitating the understanding of the operation of an embodiment of the present invention.

5 Now, referring to Figs. 3 to 15, a detailed operation of an embodiment of the present invention will be described. When instruction on a polygon to be represented is provided from a keyboard 14 shown in Fig. 3, data are supplied from a display processor 12 to the
10 coordinate conversion processor circuit 16. Then, the coordinate conversion processor circuit 16 converts the data into the coordinates $P_0(x_0, y_0, z_0)$ to $P_5(x_5, y_5, z_5)$ of the respective vertexes, which are supplied to the clip circuit 17. In the clip circuit 17, a latch 171
15 stores temporarily the coordinates of the vertexes P_0 to P_5 . The ALU 177 stores in a memory 181 in the step S1 the coordinates P_0 to P_5 of the vertexes stored temporarily in the latch 171. Then, the ALU 177 compares the stored
20 coordinates P_0 to P_5 of the vertexes and the window values of the respective planes of the three-dimensional space 4 stored in the window register 175 and at the same time it stores sign codes in the clip decision register 185.
Subsequently in the step S2, according to a flag in the clip decision register 185, it is determined whether or
25 not clipping is to be performed. More specifically, since

there is no need to clip the vectors when the respective vertexes P_0 to P_5 do not exist outside the respective planes of the three-dimensional space 4, that is, when the respective vertexes exist in the three-dimensional space 4, the ALU 177 reads in the step S15, the coordinates of the vertexes stored in the memory 181 so that the coordinates are supplied to the DDA 19 through the latches 180 and 183.

If it is determined in the step S2 that any one of the vertexes P_0 to P_5 exists outside the limits of the window values of the planes, the program proceeds to the step S3. In the step S3, 0 is set in the register 16 and the program proceeds to the subroutine for clipping shown in Fig. 7A.

In the subroutine for clipping, the coordinates (x_0, y_0, z_0) of the first vertex P_0 stored in the memory 181 are read out in the step S21 and stored respectively in the registers R0 to R2. In the step S22, the following calculation is performed, namely, subtraction between z_0 out of the coordinates of the vertex P_0 and the window values of the Z planes shown in Fig. 10 stored in the window register 175 is performed.

$$z_0 - WZ_{MAX}$$

$$z_0 - WZ_{MIN}$$

In Fig. 10, the vectors indicated by dotted lines exist on the OUT side of the plane WZ_{MAX} and the vectors indicated by solid lines exist between the plane WZ_{MAX} and the plane WZ_{MIN} , (namely on the IN side). Then, in the
 5 step S23, the coordinates (x_1, y_1, z_1) of the next vertex P_1 is read out from the memory 181 so as to be stored in the registers R4 to R6. In the step S24, subtraction between z_1 out of the coordinates of the vertex P_1 and the window values of the Z planes is performed. Namely, the
 10 following calculation is performed

$$z_1 - WZ_{MAX}$$

$$z_1 - WZ_{MIN}$$

In the above described steps S21 to S24, calculation is performed for the purpose of determining a line segment
 15 existing in the limits of the window values of the Z planes of the three-dimensional space 4, from the Z component of a start point P_0 and an end point P_1 of the first vector P_0P_1 , namely, for the purpose of determining a vector P_AP_1 shown in Fig. 10.

20 In the step S25, it is determined whether or not the Z component of the vector P_0P_1 is in the limits of the window values of the Z planes. Since the Z component of the vector P_0P_1 shown in Fig. 10 extends from the outside into the three-dimensional space 4, it is determined in
 25 the step S25 that the Z component is not in the state

IN \rightarrow IN, and it is determined in the step S26 that the Z component is not in the state IN \rightarrow OUT. In the step S27, it is determined that the Z component is in the state OUT \rightarrow IN.

5 In the step S29, the coordinates (x_0, y_0, z_0) of the start point P_0 stored in the registers R0 to R2 are transferred to the registers R8 to R10. Subsequently, in the step S30, the coordinates (x_1, y_1, z_1) of the end point P_1 stored in the registers R4 to R6 are transferred
10 to the registers R0 to R2 so that the transferred coordinates constitute a start point P_1 for the next vector. Then, in the step S31, based on the coordinates of the start point P_0 and the end point P_1 stored in the registers R8 to R10 and R0 to R2, respectively, the
15 coordinates of (x_A, y_A, z_A) of a point P_A of intersection with a window value of the Z planes are obtained to be stored in the registers R4 to R6. In the step S32, the coordinates (x_A, y_A, z_A) of the intersection point P_A stored in the registers R4 to R6 are transferred to the
20 memory 182. In the step S33, the coordinates (x_1, y_1, z_1) of the end point P_1 stored in the registers R0 to R2 are transferred to the memory 182. In the step S34, it is determined whether or not processing is completed for all the vertexes, and if the processing is not completed, the
25 program returns to the step S22.

At this time in the registers R0 to R2, the coordinates (x_1, y_1, z_1) of the end point P_1 of the first vector are stored in the above described step S30, as the coordinates of the start point P_1 for the next vector P_1P_2 . In the step S22, in the same manner as described above, subtraction between the Z component z_1 of the start point P_1 and the window values of the Z planes is performed, as in the step S23, the coordinates (x_2, y_2, z_2) of the end point P_2 of the second vector are read out from the memory 181 so as to be stored in the registers R4 to R6. Then, in the step S24, subtraction between the Z component z_2 of the end point P_2 and the window values of the Z planes is performed and in the step S25, it is determined that the vector P_1P_2 is within the limits of the window values of the Z planes (in the state IN \rightarrow IN). Then, the program proceeds to the step S35. In the step S35, the coordinates (x_1, y_1, z_1) of the start point P_1 stored in the registers R0 to R2 are stored in the memory 182 and in the step S36, the coordinates (x_2, y_2, z_2) of the end point P_2 stored in the registers R4 to R6 are stored in the memory 182.

More specifically, the vector P_1P_2 exists only within the limits of the window values of the Z planes and does not intersect with the respective planes forming the three-dimensional space 4 and accordingly, in this case,

without calculation of an intersection point, the coordinates (x_2, y_2, z_2) of the end point P_2 are stored in the registers R0 to R2 in the step S37 so that the coordinates serve as a start point of the vector next

5 P_2P_3 .

In the step S34, it is determined that processing for all the vertexes is not completed, and the program returns to the step S22. In the step S22, the Z component z_2 of the start point of the next vector P_2P_3 and the window values of the Z planes are calculated and in the step S23, the coordinates (x_3, y_3, z_3) of the end point P_3 are stored in the registers R4 to R6. Subsequently, in the step S24, subtraction between the Z component z_3 of the end point P_3 and the window values of the Z planes is performed and in the step S25, it is determined that the vector P_2P_3 exists in the window value of the Z planes. Then, the operations in the above described steps S35 to S37 are repeated. More specifically, the coordinates of the start point P_2 stored in the registers R0 to R2 and the coordinates of the end point P_3 stored in the registers R4 to R6 are stored in the memory 182 and the coordinates of the end point P_3 are stored in the registers R0 to R2 so as to serve as the coordinates of a start point of the succeeding vector P_3P_4 . In the step S34, it is determined that processing for all the vertexes

is not completed, and it is determined in the steps S22 to S25 and S35 to S37 that the vector P_3P_4 exists in the window value of the Z planes, so that the coordinates of the start point P_3 and the end point P_4 of the vector P_3P_4 are stored in the memory 182.

Furthermore, in the steps S22 to S24, processing operation for the succeeding vector P_4P_5 is performed and in the step S26, it is determined that this vector P_4P_5 extends from the inside of the window value of the Z planes to the outside (namely, in the state $IN \rightarrow OUT$). Then, the program proceeds to the step S38. In the step S38, the coordinates of the end point P_5 (x_5, y_5, z_5) stored in the registers R4 to R6 are stored in the registers R8 to R10. In the step S39, based on the coordinates of the start point P_4 stored in the registers R0 to R2 and the coordinates of the end point P_5 stored in the registers R8 to R10, the coordinates (x_{c1}, y_{c1}, z_{c1}) of a point P_{c1} of intersection with a window value of the Z planes are calculated so as to be stored in the registers R4 to R6. Then, in the step S40, the coordinates (x_4, y_4, z_4) of the start point P_4 stored in the registers R0 to R2 are stored in the memory 182 and the coordinates (x_{c1}, y_{c1}, z_{c1}) of the intersection point P_{c1} stored in the registers R4 to R6 are stored in the memory 182.

More specifically, since the vector P_4P_5 extends from the inside of the window value of the Z planes to the outside, only a component P_4P_{c1} is left out of the vector, the other components of the vector being clipped off.

5 Accordingly, only the coordinates of the start point P_4 and the intersection point P_{c1} are stored in the memory 182. Then, in the step S42, the coordinates representing the end point P_5 of the vector P_4P_5 are transferred to the registers R0 to R2 so as to be the coordinates of a start
10 point of the next vector P_5P_6 .

If it is determined in the step S34 that processing for all the vertexes is not completed, the program returns to the step S22, where subtraction between the Z component z_5 of the vertex P_5 stored in the registers R0 to R2 and
15 the window values of the Z planes is performed.

Subsequently, in the step S23, the coordinates of the end point P_0 of the next vector (that is, the start point P_0 of the first vector P_0P_1) are read out from the memory 181 so as to be stored in the registers R4 to R6. In the step
20 S24, subtraction is performed between the Z component z_0 of the end point P_0 and the window values of the Z planes. It is determined in the steps S 25 to S27 that the vector is not in any state as defined therein and in the step S28, it is determined whether or not the vector P_5P_0
25 crosses the three-dimensional space 4. Since the vector

P_5P_0 does not cross the window value of the Z planes, the program proceeds to the step S37, where the coordinates (x_0, y_0, z_0) of the end point P_0 stored in the registers R4 to R6 are stored in the registers R0 to R2. Since the
 5 vector P_5P_0 does not cross the window value of the Z planes, the coordinates of the start point P_5 and the end point P_0 of this vector P_5P_0 are not stored in the memory 182. Accordingly, this vector P_5P_0 is clipped.

Thus, clipping in the Z planes is performed for the
 10 respective vectors constituting the vertexes P_0 to P_5 of the polygon 5 and then, in the step S34, it is determined that clipping is completed and the program proceeds to the main routine shown in Fig. 6.

Since a polygon has generally a closed figure, a
 15 start point and an end point need coincide with each other. Accordingly, processing for making a start point and an end point coincide with each other is needed. For example, if a vertex P_3 shown in Fig. 8A is a first start point, the vertex P_3 becomes also a final end point since
 20 the vertex P_3 exists in a field bounded by the plane WZ_{MIN} and the plane WZ_{MAX} . As a result, a polygon $P_A P_1 P_2 P_3 P_4 P_{C1}$ bounded by the planes WZ_{MIN} and XZ_{MAX} as shown in Fig. 8B is obtained.

However, if the vertex P_0 is a first start point as
 25 shown in Fig. 9A, line segments outside the field bounded

by the plane WZ_{MIN} and the plane WZ_{MAX} are clipped since this vertex P_0 exists outside this field. Then, the vertex P_A becomes a first start point and the vertex P_{C1} becomes a final end point and as a result, as shown in
5 Fig. 9B, the first start point P_A and the final end point P_{C1} do not coincide with each other.

Accordingly, in the step S4 of the main routine, it is determined whether or not a point of coincidence
10 between a first start point and a final end point exists in the field bounded by the plane WZ_{MIN} and the plane WZ_{MAX} . Then, if the first start point and the final end point coincide with each other as shown in Fig. 8A, the program proceeds to the step S6. If the first start point and the final start point do not coincide with each other
15 as shown in Fig. 9A, the program proceeds to the step S5. In the step S5, the final end point P_0 applied till then is made to be a passing point and the coordinates of the first start point are made to be the coordinates of the final end point.

20 In the step S6, all the data stored in the memory 182 are transferred to the memory 181. Then, in the step S7, clipping in the Y planes is performed. A polygon clipped with respect to the Z planes as described above is represented by the vertexes P_A , P_1 , P_2 , P_3 , P_4 and P_{C1} as
25 shown in Fig. 11. Since this polygon exists between the Y

planes WY_{MAX} and WY_{MIN} , clipping in the Y planes is not applied. More specifically, in the clipping subroutine shown in Figs. 7A to 7D, it is determined in the step S25 that the vectors $P_A P_1$, $P_1 P_2$, $P_2 P_3$, $P_3 P_4$, $P_4 P_{C1}$ and $P_{C1} P_A$ are all in the state $IN \rightarrow IN$ and the operations in the steps S35 to S37 are repeated.

When processing in the Y planes as described above is completed, the program returns to the step S8 of the main routine, where the first start point and the final end point of the polygon in the Y planes coincide with each other. If the first start point and the final end point do not coincide with each other, processing for making them coincide is applied in the step S9. Since clipping is not performed in the Y planes as described above, it is determined in the step S8 that the first start point and the final end point coincide with each other, and in the step S10, all the data stored in the memory 182 are transferred to the memory 181. Then, the program proceeds to the step S11, where processing with respect to the X planes is performed as shown in Fig. 12. As to the polygon shown in Fig. 12, a portion shown by the solid lines exists in a field between the X planes WX_{MAX} and WX_{MIN} (namely, in the state IN) and a portion shown by the dotted lines is outside the plane WX_{MAX} (namely, in the state OUT). Accordingly, clipping is not applied to the

vectors $P_A P_1$ and $P_1 P_2$, while clipping is applied to a vector $P_C P_3$ taken out of the vector $P_2 P_3$ by connecting a point of intersection with the plane WX_{MAX} and the end point P_3 as well as to the vectors $P_3 P_4$, $P_4 P_{C1}$ and $P_{C1} P_B$.

5 As a result, a polygon represented by the newly obtained vectors $P_A P_1$, $P_1 P_2$, $P_2 P_C$, $P_C P_B$ and $P_B P_A$ is finally obtained.

When processing with respect to the X planes is completed as described above, the program returns again to
 10 the step S12 of the main routine, where it is determined whether or not the first start point and the final end point of the polygon newly obtained by clipping in the X planes coincide with each other. If the points do not coincide processing for making them coincide with each
 15 other is applied in the step S13, and in the step S14, all the data stored in the memory 182 are transferred to the memory 181. Then, in the step S15, the data stored in the memory 181 are read out so as to be supplied to the DDA19 through the latches 180 and 183.

20 Now, description will be made of an operation in case where a vector $P_6 P_7$ enters the three-dimensional space 4 from the outside and goes out again as shown in Figs. 13 to 15. In the case of such a vector, it is determined in the step S28 shown in Fig. 7A that the vector crosses the
 25 three-dimensional space 4, and the program proceeds to the

flow shown in Fig. 7C. More specifically, in the step S43, the coordinates of an end point P_7 stored in the registers R4 to R6 are transferred to the registers R8 to R10 and R17 to R19. In the step S44, the coordinates of a start point P_6 stored in the registers R0 to R2 are subtracted from the coordinates of the end point P_7 stored in the registers R8 to R10, so that ΔX , ΔY and ΔZ are obtained to be stored in the ΔX register 172, the ΔY register 173 and the ΔZ register 174, respectively. Then, in the step S45, the number of loops is determined according to the values of $|\Delta X|$, $|\Delta Y|$ and $|\Delta Z|$ stored in the registers 172, 173 and 174, respectively. More specifically, if the values of $|\Delta X|$, $|\Delta Y|$ and $|\Delta Z|$ are relatively large, the number of loops is increased.

In the step S46, the coordinates of the start point stored in the registers R0 to R2 are transferred to the registers R4 to R6. In the step S47, the differences between the coordinates of the start point P_6 and the end point P_7 are divided by two to obtain $\Delta X/2$, $\Delta Y/2$ and $\Delta Z/2$, respectively, which are stored in the ΔX register 172, ΔY register 173 and ΔZ register 174, respectively. Then, in the step S48, the coordinates of the start point P_6 stored in the registers R4 to R6 are added to the contents of the registers 172, 173 and 174 and the results of addition are stored in the registers R12, R13 and R14.

More specifically, in the step S48, the vector P_6P_7 is divided by two and the coordinates of a point P_8 obtained by the division are calculated so as to be stored in the registers R12, R13 and R14. In an example shown in

5 Fig. 13, the end point P_7 is more distant from the three-dimensional space 4 as compared with the start point P_6 and as a result the point P_8 obtained by the division exists outside the three-dimensional space 4.

In the step S49, subtraction is made between the z
10 component of a vector P_6P_8 and the window values of the z planes and, in the step S50, it is determined whether the vector P_6P_8 is in the state OUT - IN or in the state OUT \rightarrow OUT. In the example shown in Fig. 13, the vector P_6P_8 is in the state OUT - OUT, and accordingly, the
15 program proceeds to the step S51, where it is determined whether looping is performed by the number set in the step S45. When it is determined that looping is not completed by the set number and it is determined in the step S52 that intersection with the three-dimensional space 4 is
20 made, the program returns to the step S47. In the step S47, $\Delta X/2$, $\Delta Y/2$ and $\Delta Z/2$ stored in the ΔX register 172, ΔY register 173 and ΔZ register 174, respectively, are further divided by two and, in the step S37, the values obtained by the division are added to the coordinates of
25 the start point P_6 stored in the registers R4 to R6, so

that the values obtained by the addition are stored in the registers R12 to R14. More specifically, in this step S48, the divided vector P_6P_8 is further divided by two to obtain a point P_9 . Then, in the step S49, subtraction is made between the Z component of a vector P_6P_9 and the window values of the Z planes, so that it is determined in the step S50 whether or not the vector P_6P_9 enters the three-dimensional space 4. In the example shown in Fig. 13, the vector P_6P_9 is in the state $OUT \rightarrow IN$ and as a result, the program proceeds to the step S53.

In the step S53, the coordinates of the start point P_6 stored in the registers R0 to R2 are transferred to the registers R8 to R10, and in the step S54, the coordinates of the end point P_9 stored in the registers R12 to R14 are transferred to the registers R0 to R2. Then, in the step S55, the coordinates of a point P_D of intersection between the vector P_6P_9 and the plane WZ_{MIN} are calculated so as to be stored in the registers R4 to R6. In the step S56, the coordinates of the intersection point P_D are stored in the registers R0 to R2 and at the same time stored in the memory 182.

Furthermore, in the step S57, the coordinates of an end point P_7 of the other divided vector stored in the registers R17 to R19 are stored in the registers R8 to R10. Then, the coordinates of a point P_E of intersection

between the other vector P_9P_7 and the plane WZ_{MAX} of the three-dimensional space 4 are calculated to be stored in the registers R4 to R6. In the step S59, the coordinates of the intersection point P_E are transferred to the memory
 5 182. Subsequently, the program proceeds again to the step S42 shown in Fig. 7B, where the coordinates of the end point P_7 stored in the registers R8 to R10 are stored in the registers R0 to R2. Such a sequence of processing operation as described above is also performed with
 10 respect to the Y planes and the X planes as shown in Fig. 14.

In case where the coordinates of the start point P_6 are of more distance from the three-dimensional space 4 as compared with the end point P_7 as shown in Fig. 15, the
 15 operations in the steps S43 to S51 are performed. In the example shown in Fig. 15, the vector P_6P_8 obtained by division of the vector P_6P_7 still exists outside the plane WZ_{MIN} of the three-dimensional space 4. However, if this vector P_6P_8 is further divided to obtain a new vector
 20 P_6P_9 , the new vector P_6P_9 also does not cross the three-dimensional space 4. For this reason, in the example shown in Fig. 15, the vector P_6P_7 is divided to obtain a new vector P_8P_7 and this vector P_8P_7 is further divided to obtain a new vector $P_{10}P_7$. Accordingly, $\Delta X/2$,

$\Delta Y/2$ and $\Delta Z/2$ are added to the coordinates to the point P_8 obtained by division of the vector P_6P_7 so that the coordinates of a new point P_{10} are calculated to be stored in the registers R4 to R6. Except for the above described point, the vector processing operation in Fig. 15 is the same as the processing operation shown in Fig. 13.

Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

CLAIMS

1. A clip circuit of a CRT display unit for clipping, out of a polygon, portions protruding from the three-dimensional space represented in the CRT screen at the time of inserting partially said polygon into said
- 5 three-dimensional space, said clip circuit comprising:
- coordinate providing means (16) for providing three-dimensional coordinate data representing the respective vertexes of said polygon,
- three-dimensional plane data providing means (175)
- 10 for providing data on the primary to tertiary planes forming said three-dimensional space, said primary to tertiary planes being respectively comprised of a pair of planes spaced by a predetermined distance,
- determining means (S2) for determining, based on the
- 15 three-dimensional coordinate data from said coordinate providing means and the data from said three-dimensional plane data providing means, whether the respective vectors represented by said three-dimensional coordinate data and constituting said polygon exist between the pairs of said
- 20 three-dimensional planes,
- first extracting means (S3) responsive to the determination of nonexistence of the vectors in the pairs of said three-dimensional plane by said determining means,

for extracting from the respective vectors, a line segment existing in the pair of said primary planes based on the respective vectors and the data on the pair of said primary planes provided from said three-dimensional plane data providing means, so that coordinate data representing said line segment are provided as output and the other line segments excluding said line segments are clipped off,

second extracting means (S7) responsive to the output from said first extracting means, for extracting a line segment existing in the pair of said secondary planes, from said line segment extracted by said first extracting means, and based on the data on the pair of secondary planes provided from said three-dimensional plane data providing means, so that the coordinate data representing said line segment are provided as the output and the other line segments excluding said line segment are clipped off,

third extracting means (S11) responsive to the output from said second extracting means, for extracting a line segment existing in the pair of said tertiary planes, from said line segment extracted by said second extracting means, and based on the data on the pair of tertiary planes provided from said three-dimensional plane data providing means, so that the coordinate data representing said line segment are provided as the output and the other

line segments excluding said line segment are clipped off,
and

output means (S15) responsive to said first to third
extracting means for providing the coordinate data

5 representing said line segments extracted by said first to
third extracting means.

2. A clip circuit of a CRT display unit in
accordance with claim 1, wherein

10 said first extracting means comprises:

first vector calculating means (S21 to S27)

- responsive to the output from said determining means, for
calculating, based on the respective vectors and
connecting the vertexes of said polygons and the data on
15 the pair of said primary planes, a vector extending from
the outside of a field bounded by the pair of said primary
planes into said field and a vector extending from the
inside of said field to the outside, out of the respective
vectors connecting the vertexes of said polygon.

20 first intersection point calculating means (S31
and S39) responsive to the output from said first vector
calculating means, for calculating, based on said
calculating vectors and the data on the pair of said
primary planes, intersection points at which said

calculated vectors cross either of the pair of said primary planes and

primary polygon extracting means (S32, S33, S35 to S37 and S40 to S42) responsive to the output from said first intersection point calculating means, for extracting, based on said calculating intersection points and the data on the pair of said primary planes, a polygon represented by the line segments connecting said calculated intersection points and the vectors existing in the field bounded by the pair of said primary planes,

said second extracting means comprises:

second vector calculating means (S21 to S27) responsive to the output from said primary polygon extracting means, for calculating, based on said respective vectors and the data on the pair of said secondary planes, a vector extending from the outside of a field bounded by the pair of said secondary planes into said field and a vector extending from the inside of said field to the outside, out of the vectors connecting the vertexes of said polygon extracted by said primary polygon extracting means,

second intersection point calculating means (S31, and S39) responsive to the output from said second vector calculating means, for calculating, based on said calculated vectors and the data on the pair of said

secondary planes, intersection points at which said
calculated vectors cross either of the pair of said
secondary planes, and

secondary polygon extracting means (S32, S33,
5 S35 to S37 and S40 to S42) responsive to the output from
said second intersection point calculating means, for
extracting, based on said calculated intersection points
and the data on the pair of secondary planes, a polygon
represented by the line segments connecting said
10. calculated intersection points and the vectors existing in
the field bounded by the pair of said secondary planes,
and

said third extracting means comprises:

third vector calculating means (S21 to S27)
15 responsive to the output from said secondary polygon
extracting means, for calculating, based on said
respective vectors and the data on the pair of said
tertiary planes, a vector extending from the outside of a
field bounded by the pair of said tertiary planes into
20 said field and a vector extending from the inside of said
field to the outside, out of the vectors connecting the
vertexes of said polygon extracted by said secondary
polygon extracting means,

third intersection point calculating means (S31
25 and S39) responsive to the output from said third vector

calculating means, for calculating, based on said
calculated vectors and the data on the pair of said
tertiary planes, intersection points at which said
calculated vectors cross either of the pair of said
5 tertiary planes, and

tertiary polygon extracting means (S32, S33, S35 to
S37 and S40 to S42) responsive to the output from said
third intersection point calculating means, for
extracting, based on said calculated intersection points
10 and the data on the pair of said tertiary planes, a
polygon represented by the line segments connecting said
calculated intersection points and the vectors existing in
the field bounded by the pair of said tertiary planes.

3. A clip circuit of a CRT display unit in
15 accordance with claim 2, wherein

said first vector calculating means comprises means
(S24 to S27) for determining, based on the differences
between the coordinates data representing the respective
vertexes of said polygon and the data representing the
20 respective planes of the pair of said primary planes,
whether the vectors connecting the respective vertexes
exist in the field bounded by the pair of said primary
planes or extend from the inside of said field to the
outside or extend from the outside into said field,

said second vector calculating means comprises means (S24 to S27) for determining, based on the differences between the coordinate data representing the respective vertexes of said polygon extracted by said primary polygon extracting means and the data representing the respective planes of the pair of said secondary planes, whether the vectors connecting the respective vertexes exist in the field bounded by the pair of said secondary planes or extend from the inside of said field to the outside or extend from the outside into said field, and

said third vector calculating means comprises means (S24 to S27) for determining, based on the differences between the coordinate data representing the respective vertexes of said polygon extracted by said secondary polygon extracting means and the data representing the respective planes of the pair of said tertiary planes, whether the vectors connecting the respective vertexes exist in the field bounded by the pair of said tertiary planes or extend from the inside of said field to the outside or extend from the outside into said field.

4. A clip circuit of a CRT display unit in accordance with claim 2, wherein

said primary polygon extracting means comprises means (S5) for substituting any one of said calculated

intersection points for the first start point coordinates
and the final end point coordinates in case where the
first start point coordinates and the final end point
coordinates of said extracted polygon do not exist in the
5 field bounded by the pair of said primary planes,

said secondary polygon extracting means comprises
means (S9) for substituting any one of said calculated
intersection points for the first start point coordinates
and the final end point coordinates in case where the
10 first start point coordinates and the final end point
coordinates of said extracted polygon do not exist in the
field bounded by the pair of said secondary planes, and

said tertiary polygon extracting means comprises
means (S13) for substituting any one of said calculated
15 intersection points for the first start point coordinates
and the final end point coordinates in case where the
first start point coordinates and the final end point
coordinates of said extracted polygon do not exist in the
field bounded by the pair of said tertiary planes.

FIG. 1

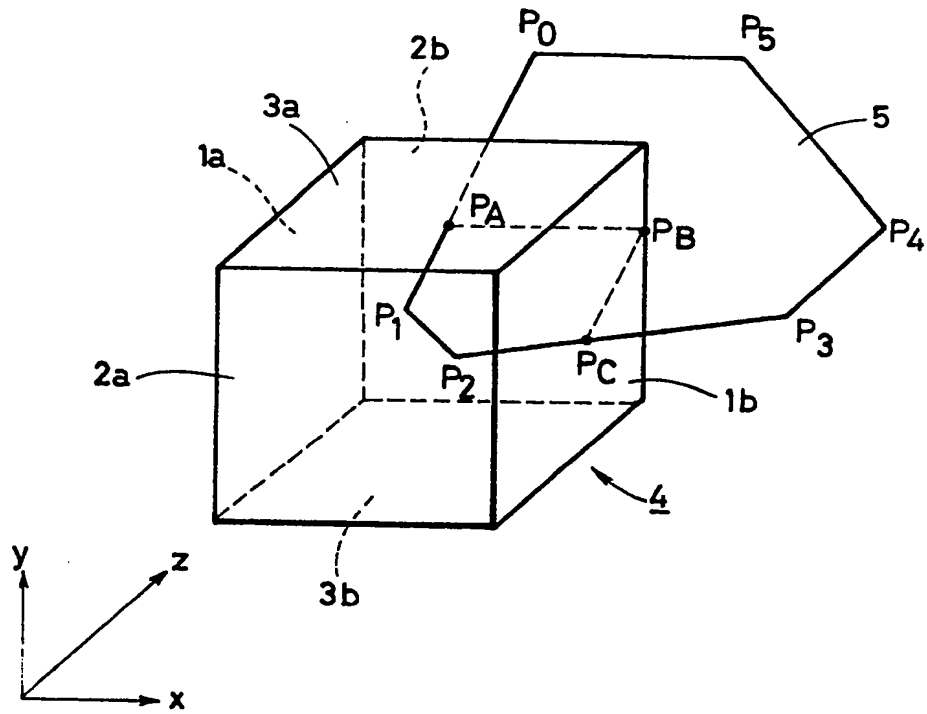


FIG. 2




FIG. 3

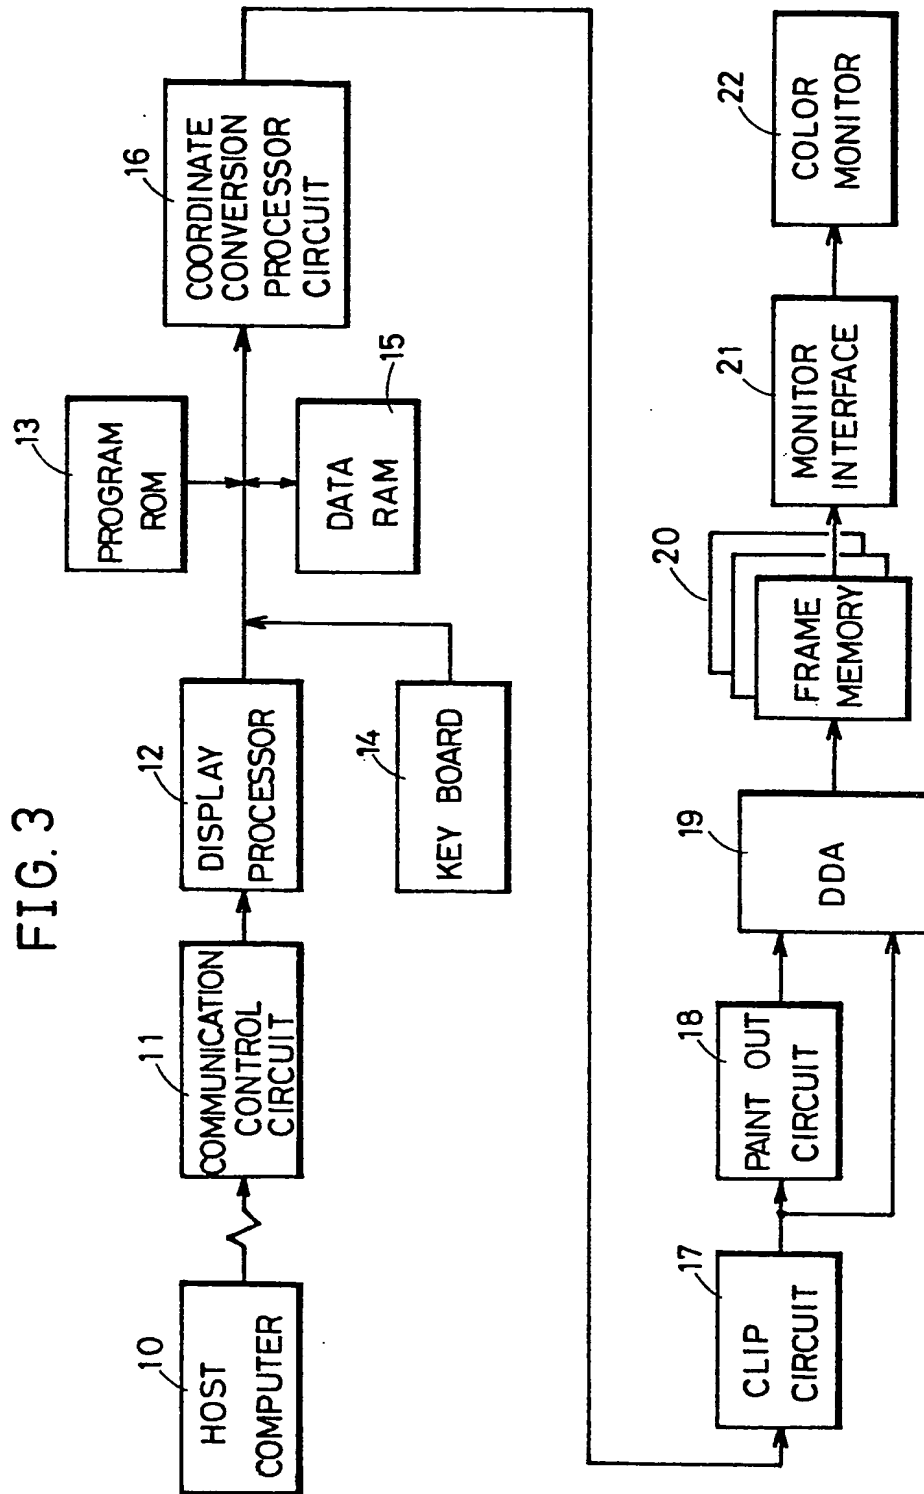


FIG. 4

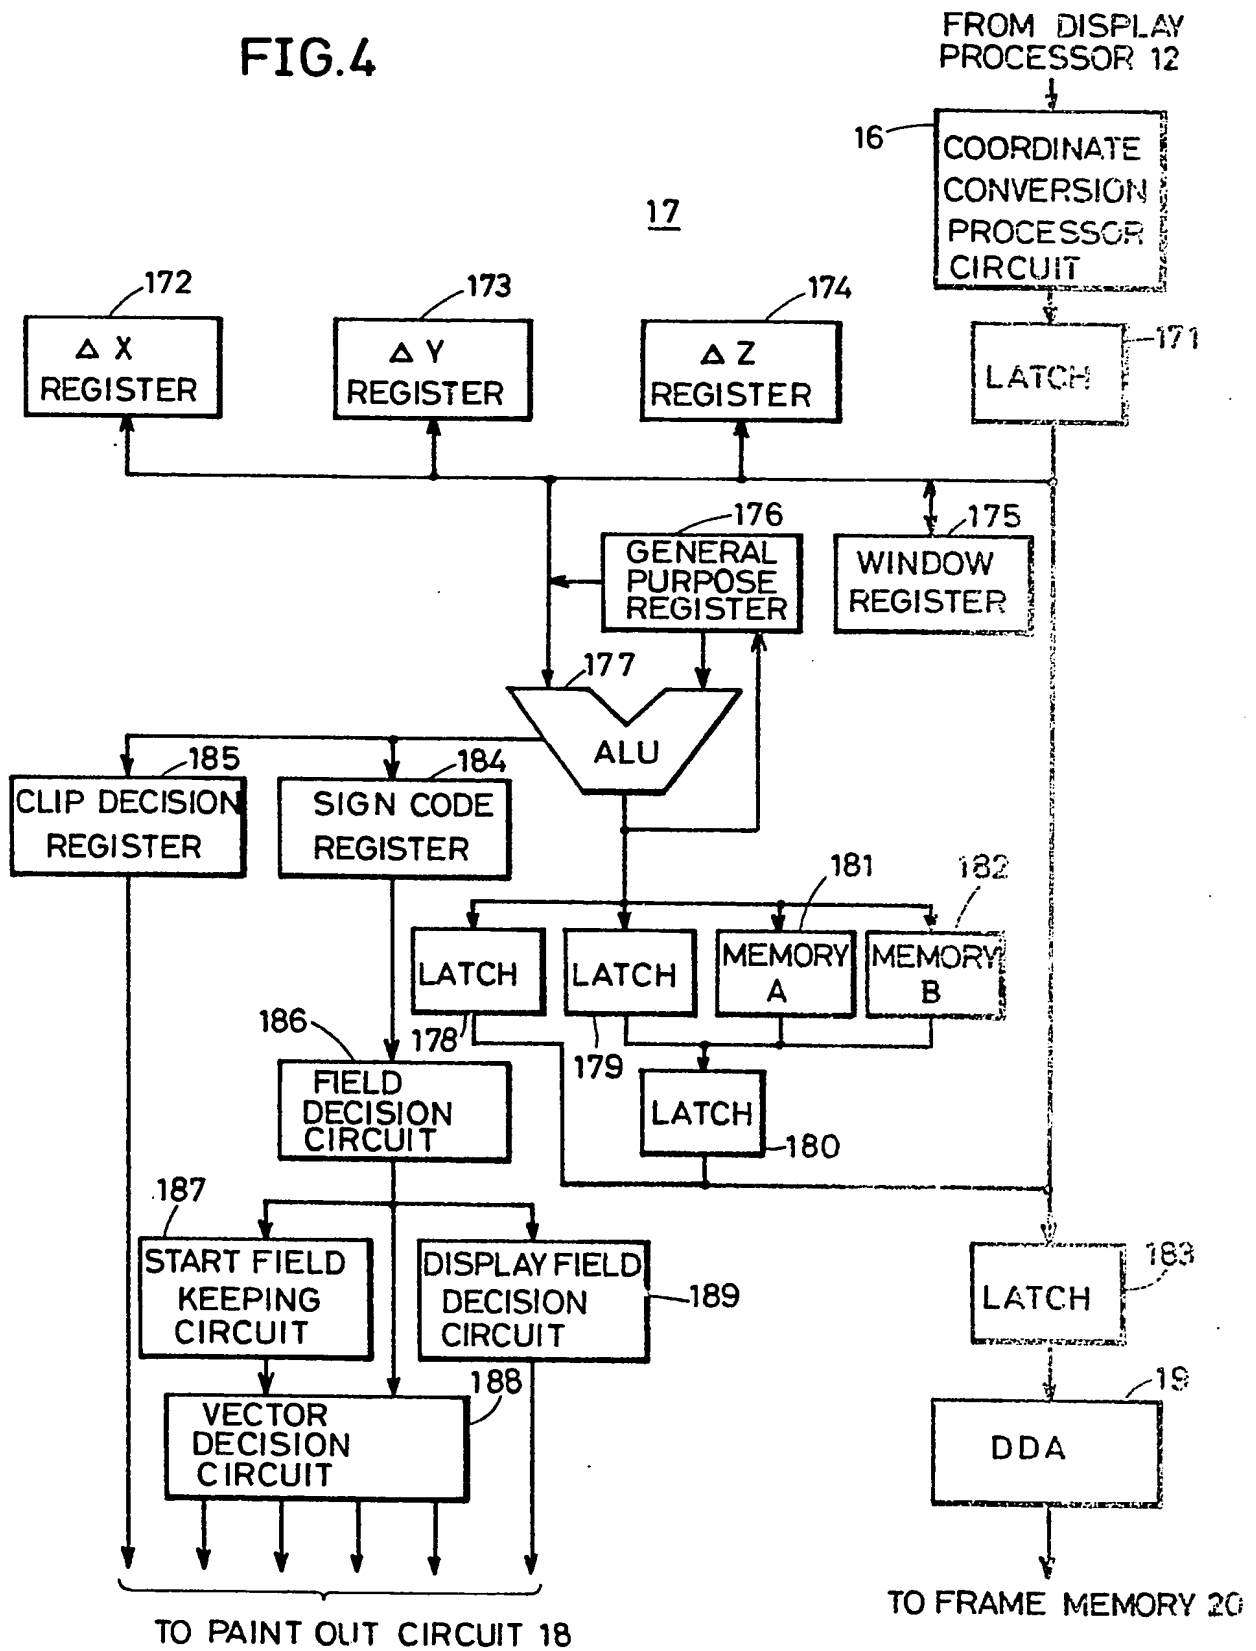


FIG. 5A

FIRST POINT x	R0
FIRST POINT y	R1
FIRST POINT z	R2
INTERSECTION POINT x	R4
INTERSECTION POINT y	R5
INTERSECTION POINT z	R6
DESTINATION POINT x	R8
DESTINATION POINT y	R9
DESTINATION POINT z	R10

FIG. 5B

INTERSECTION POINT x	R12
INTERSECTION POINT y	R13
INTERSECTION POINT z	R14
CLIP PARAMETER R16=0 → z CLIP R16=-1 → y CLIP OTHER → x CLIP	R16
STACK R8	R17
STACK R9	R18
STACK R10	R19

FIG. 8A

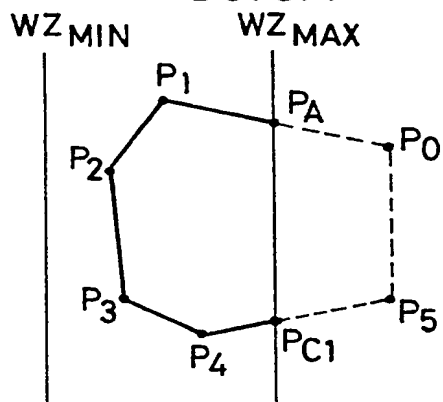


FIG. 9A

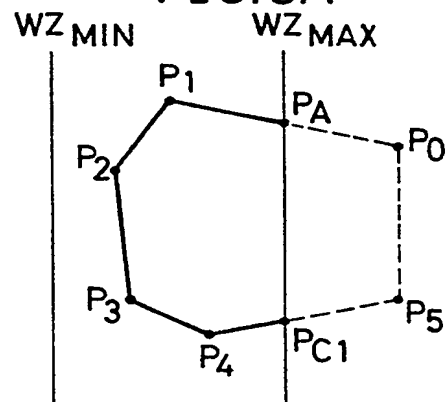


FIG. 8B




FIG. 9B




FIG. 6

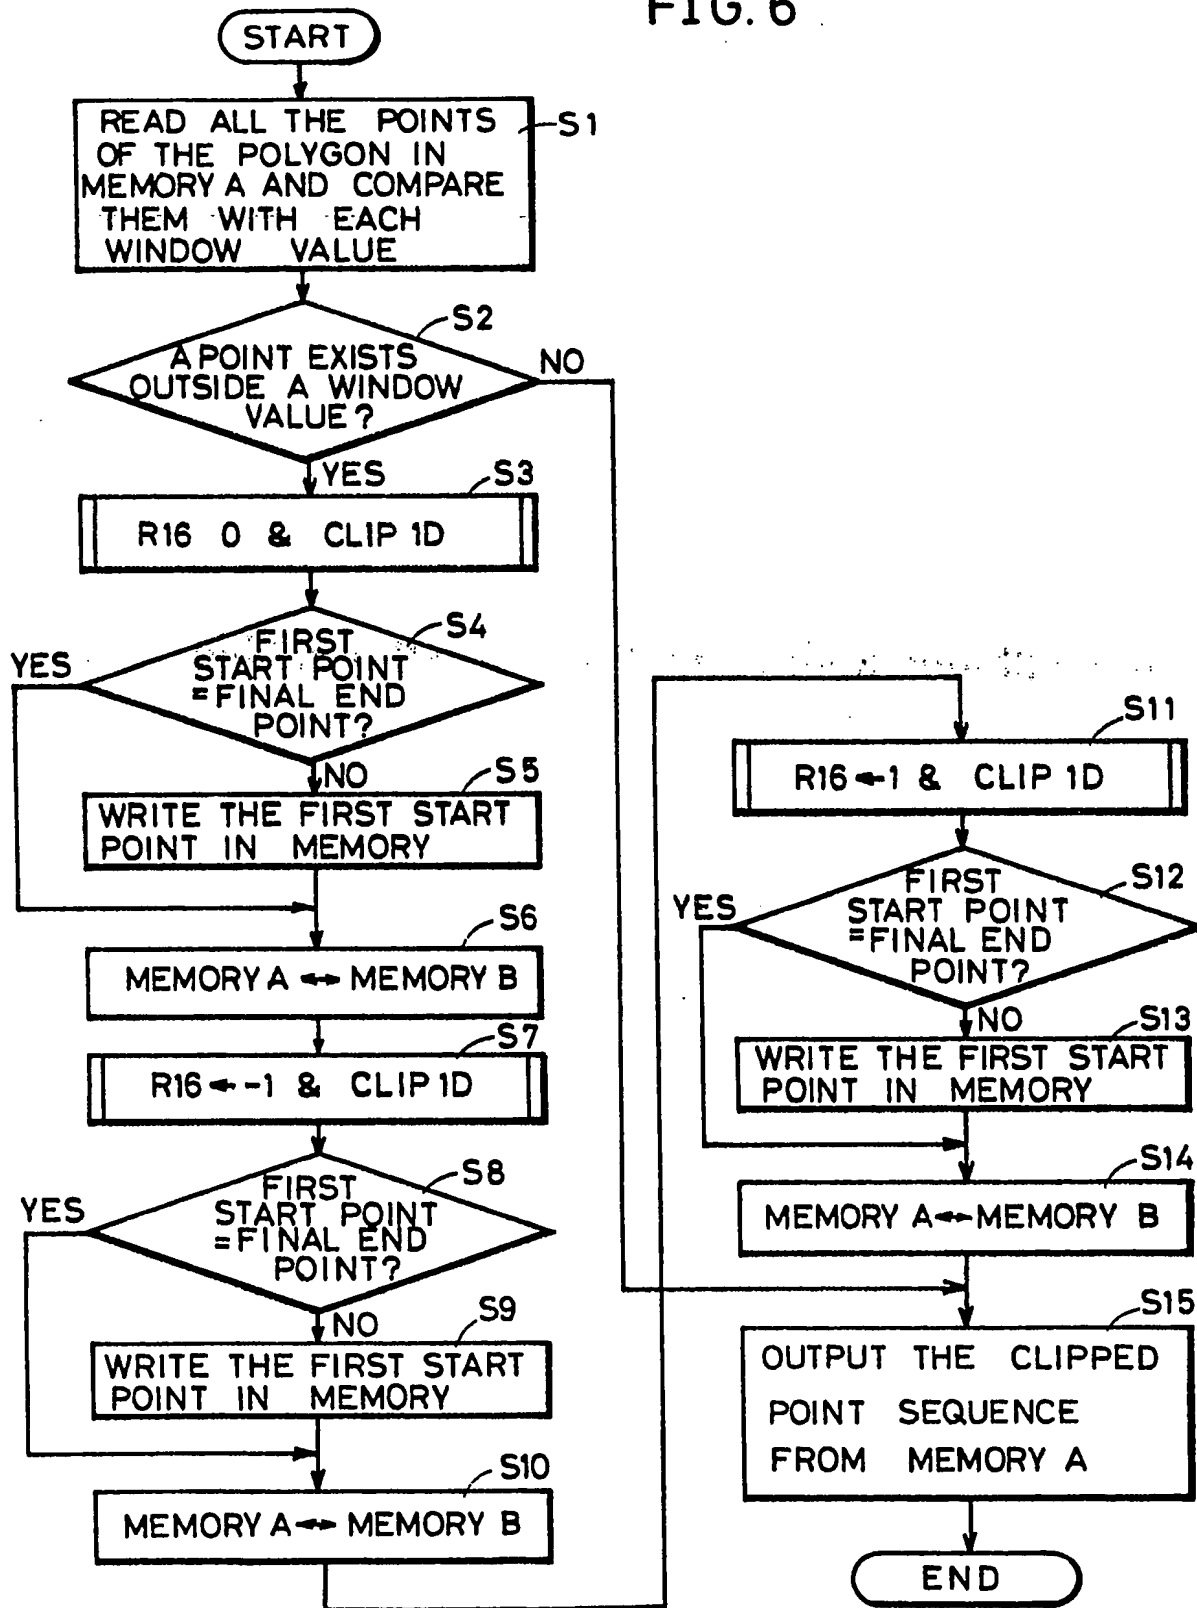


FIG. 7A

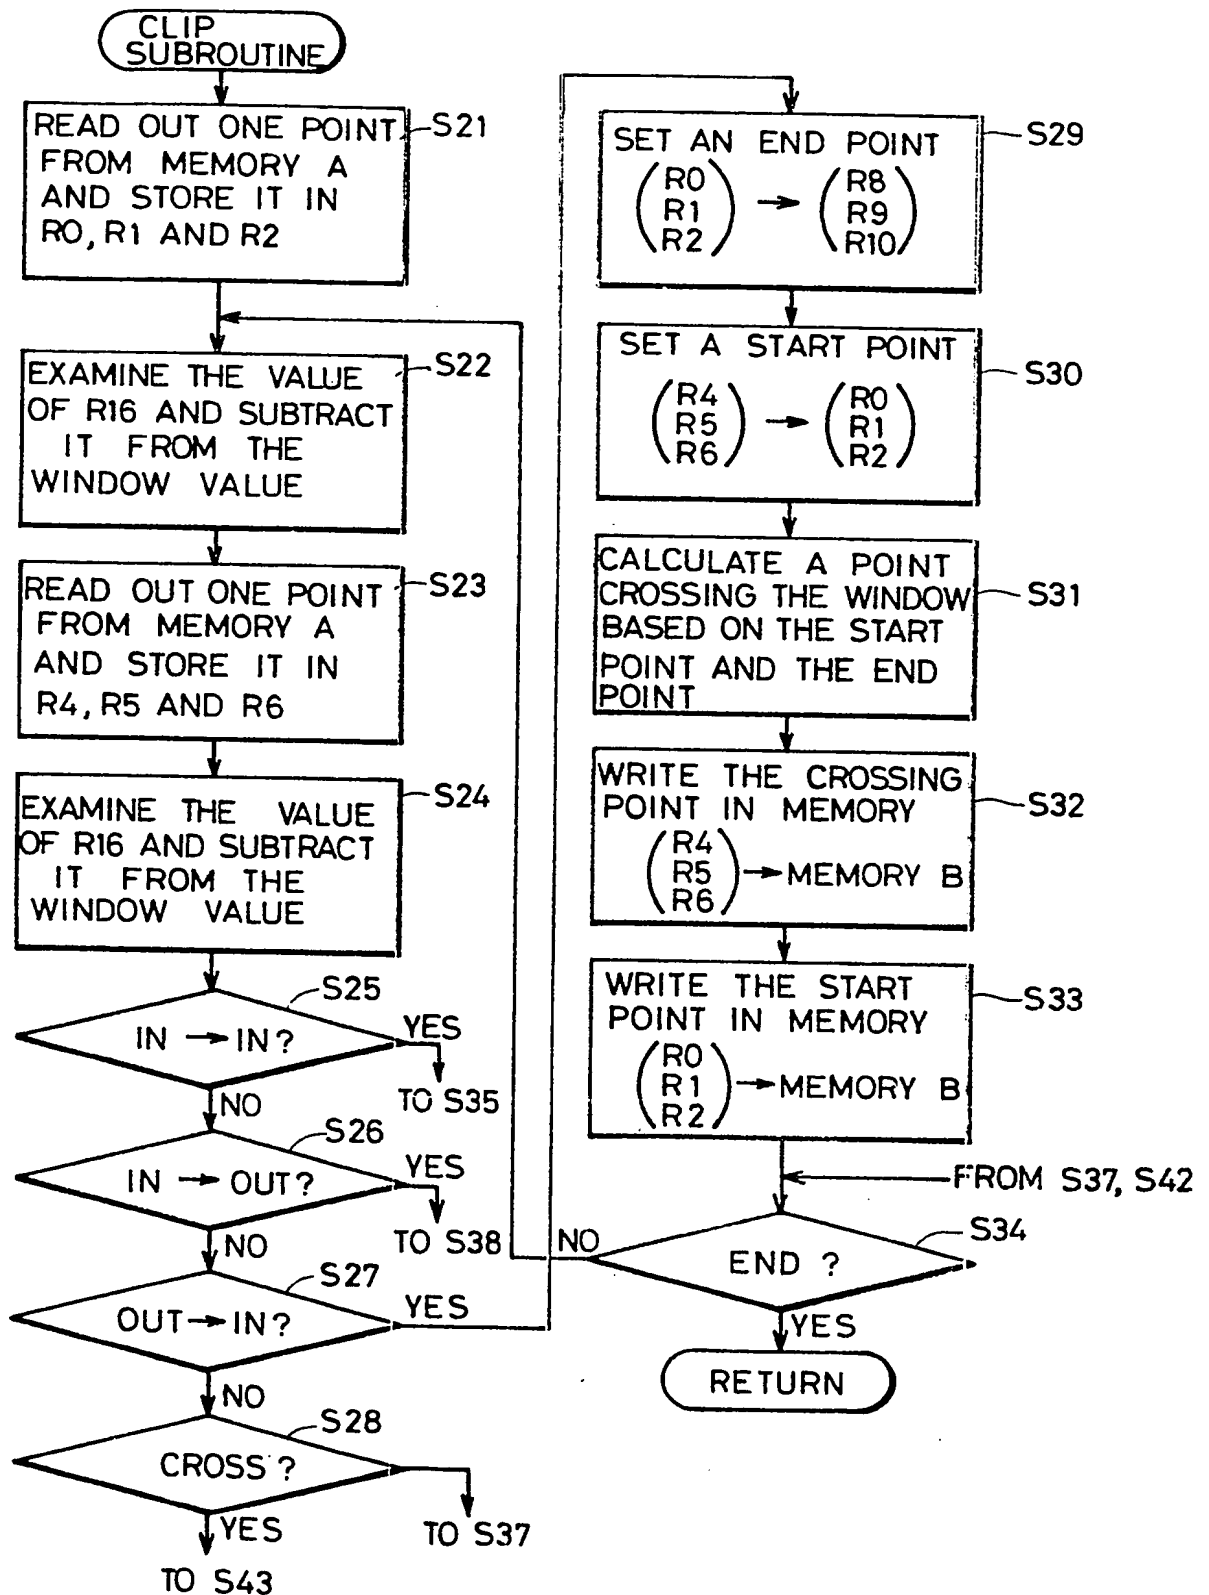


FIG. 7B

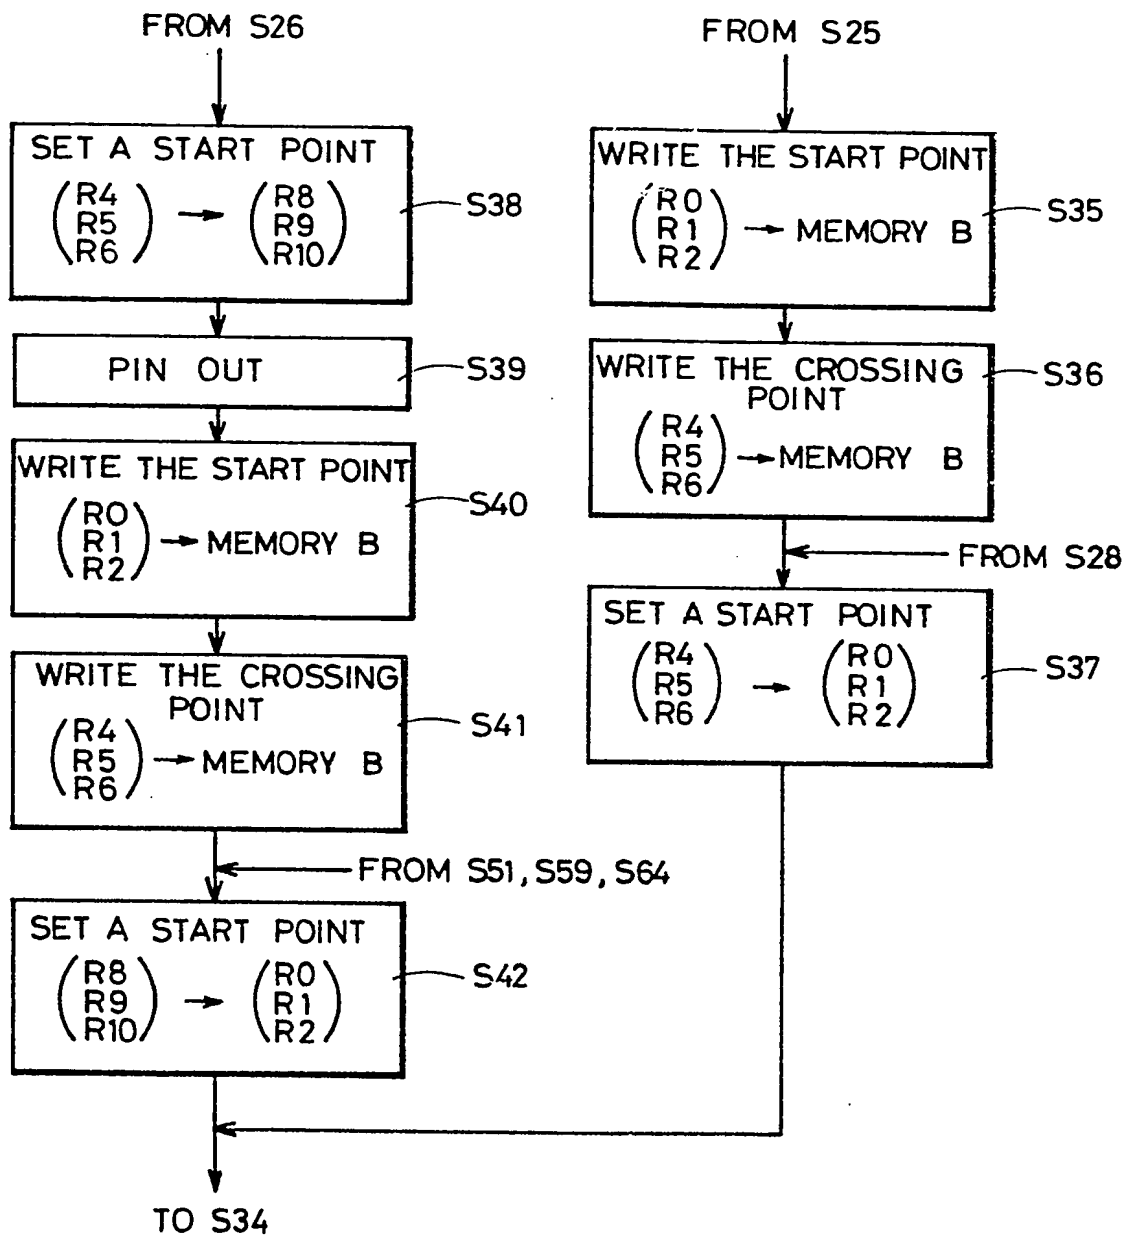


FIG. 7C

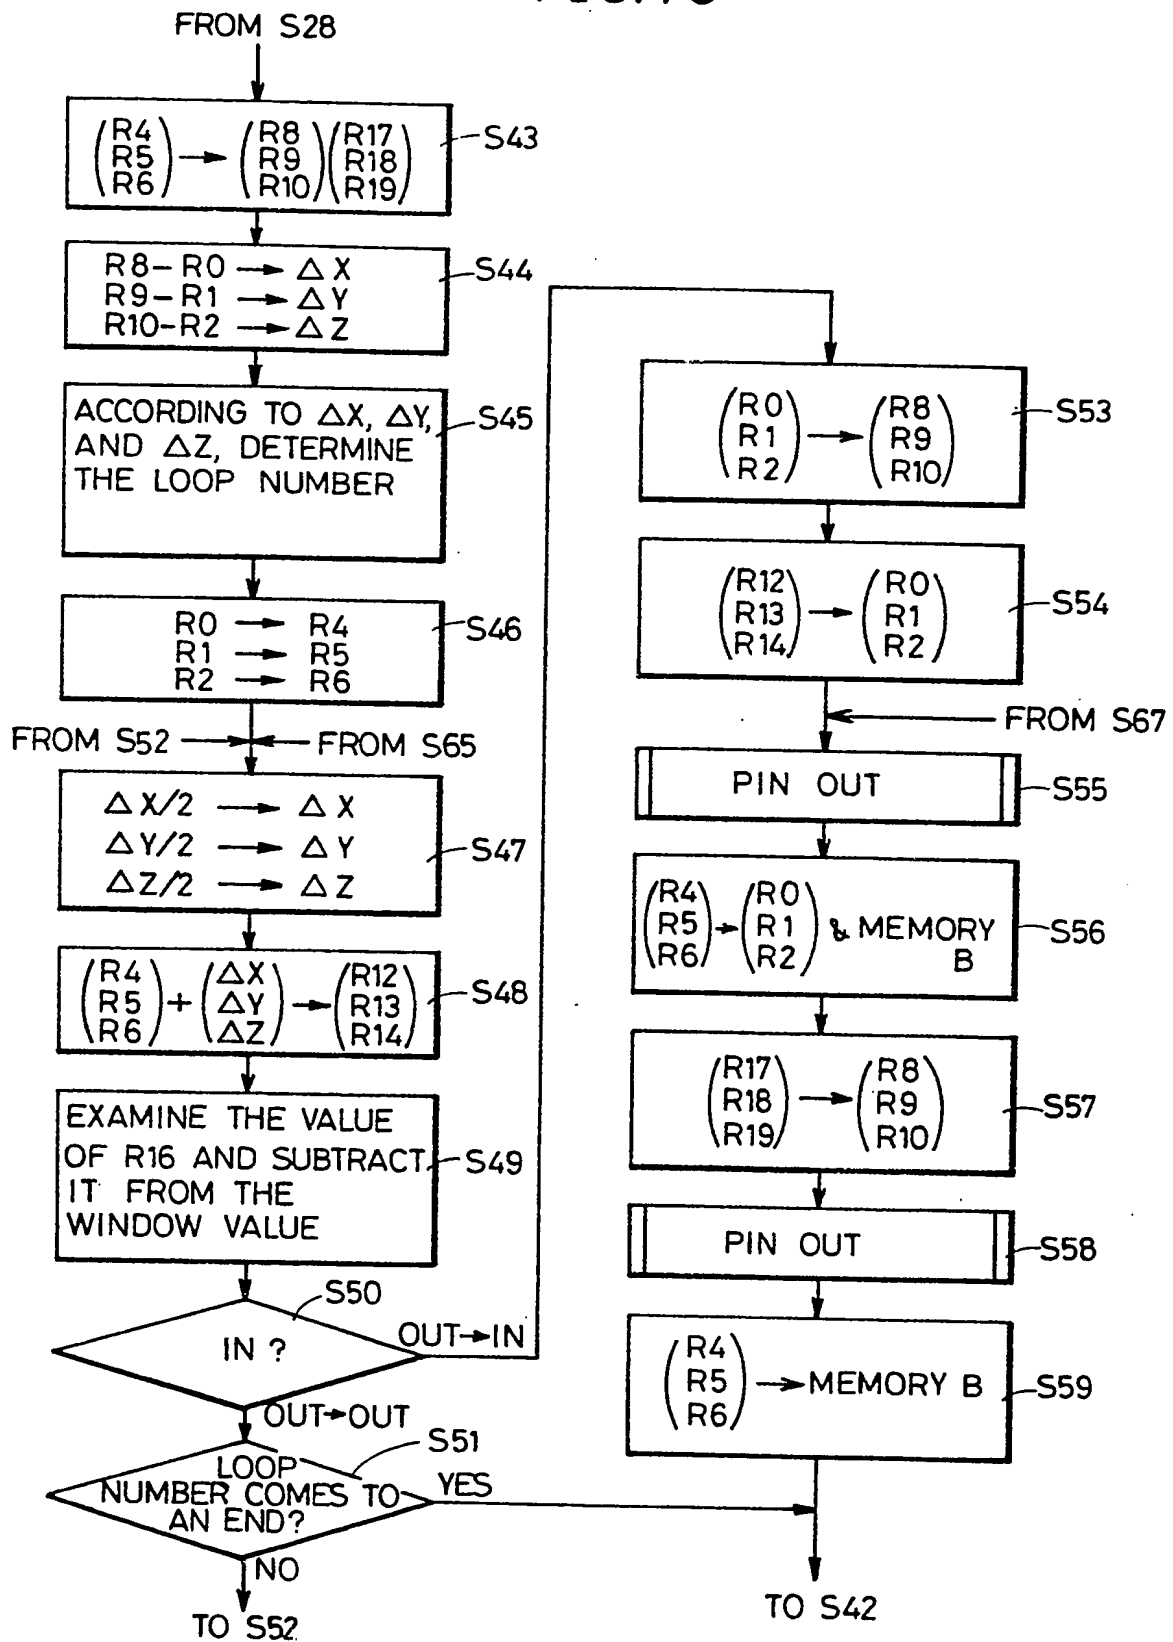


FIG. 7D

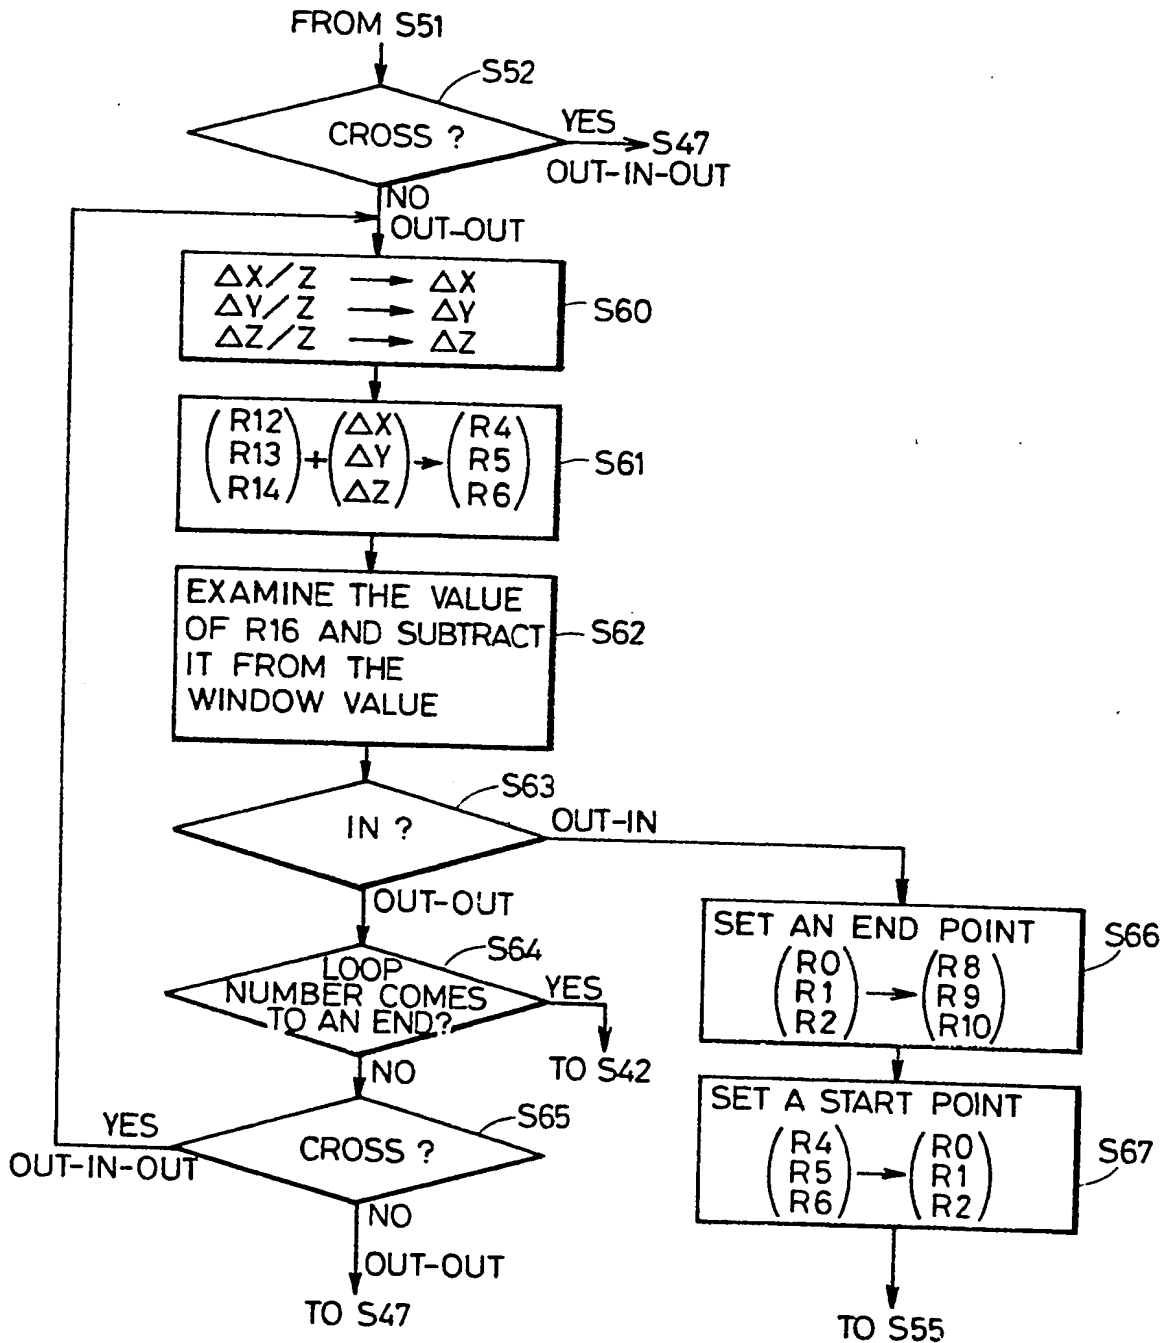


FIG. 10

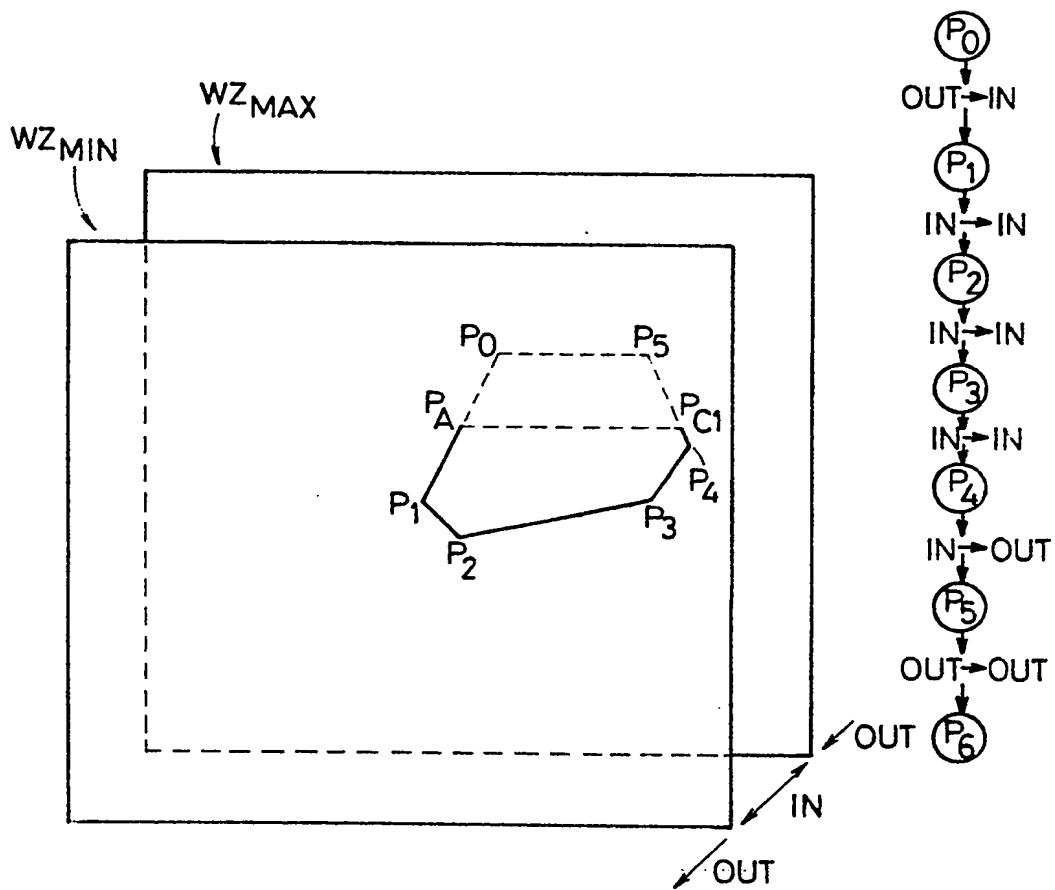


FIG. 11

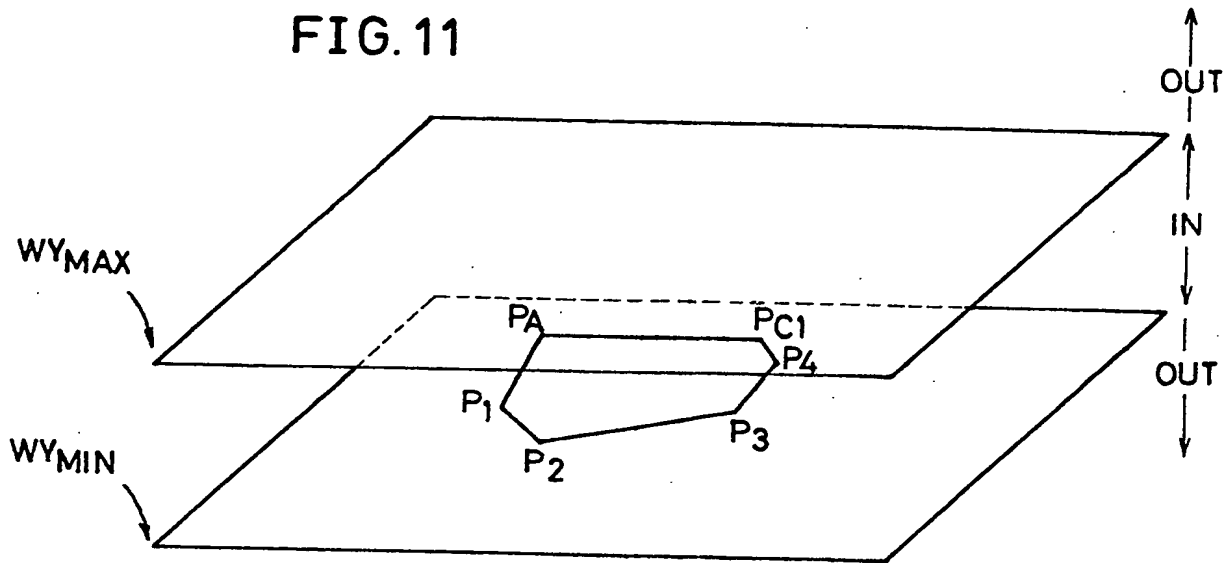


FIG. 12

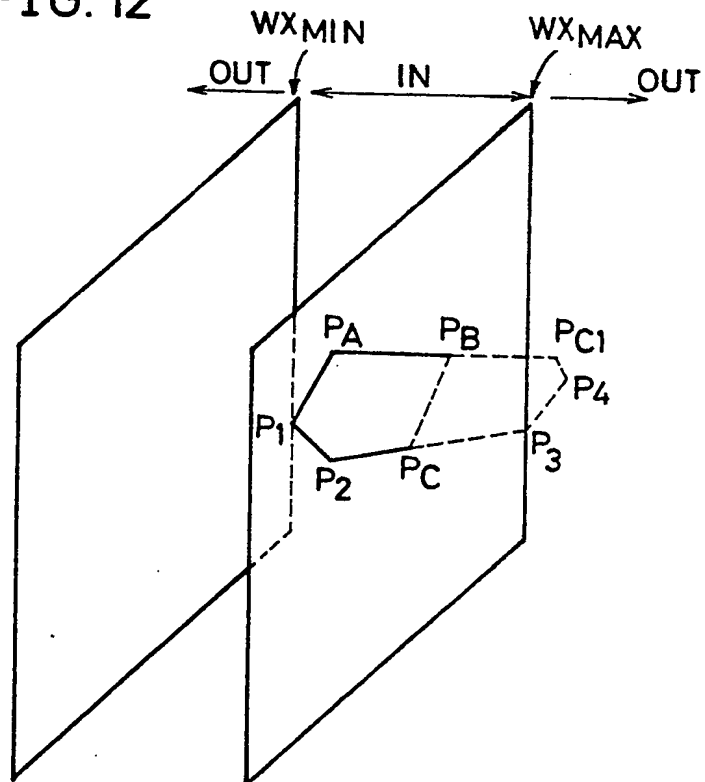


FIG.13

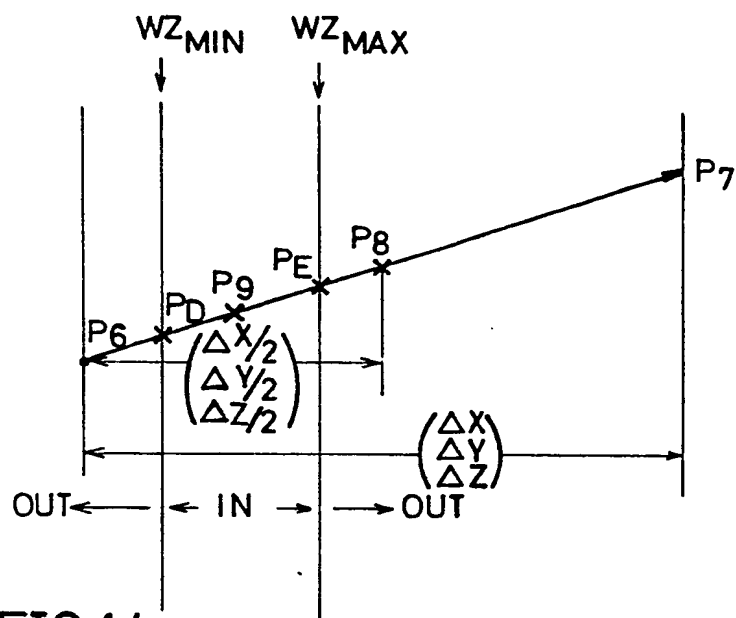


FIG.14

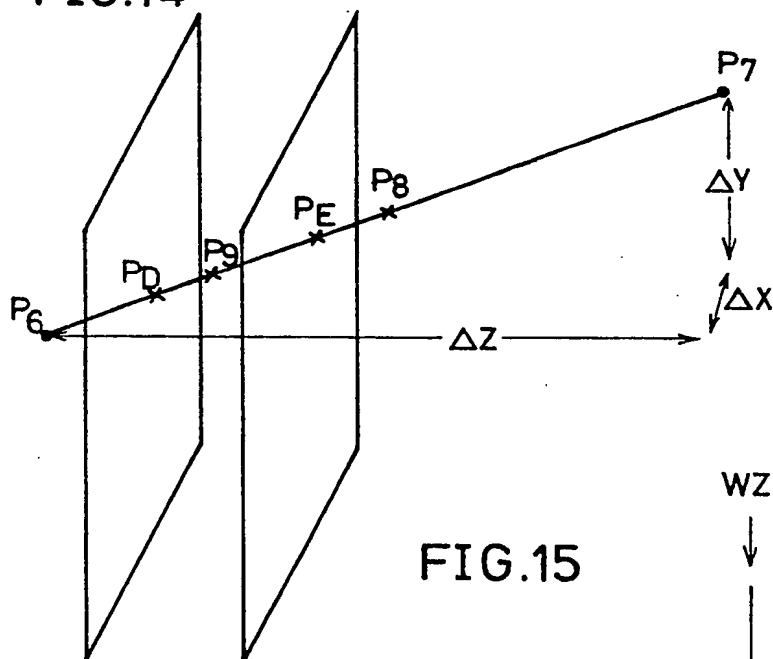


FIG.15

